

## FEATURES

- Vitreous china
- Elongated front siphon action jetted bowl
- 12" (305 mm) rough-in
- High efficiency-consumption 1.28 gpf/4.8 Lpf
- 2" (51 mm) fully glazed trapway
- Oversized 3" (76 mm) flush valve with chemical resistant flapper
- 6.61" x 7.95" (168 mm x 202 mm) water surface area
- Includes color matched plastic trip lever
- Toilet seat sold separately
- 100% factory flush tested
- Limited lifetime warranty

## MODEL & DESCRIPTION

Combination 4048 consists of:

4388 AltimaMAX elongated front bowl  
Shipping weight: 48 lb (21 kg)

4140 AltimaMAX tank  
Shipping weight: 32 lb (14.5 kg)


Tank lid:

7440 Tank Lid for 4140 tank 12 lb (5.4 kg)

## CODES & STANDARDS

Meets or exceeds the following:

- ASME A112.19.2
- CSA B45.1
- IAPMO/cUPC
- HET (High Efficiency Toilet)
- EPA WaterSense



Dimensions may vary (+) or (-) 1/4". Dimensions shown in parentheses are in millimeters: 25.4 mm = 1 inch. Note: Fixture dimensions are nominal and conform with dimension and performance requirements of ASME A112.19.2-2008/CSA B45.1-08 standards. PSI rating: 20 minimum to 80 maximum per ASME A112.19.2-2008/CSA B45.1-08 standards. Dimensions subject to change or cancellation without notice. Briggs is not responsible for the use of superceded or voided specification information.


Revised March 2014



## COLORS

- WHITE (130)
- BISCUIT (235)
- BONE (733)

## SPECS

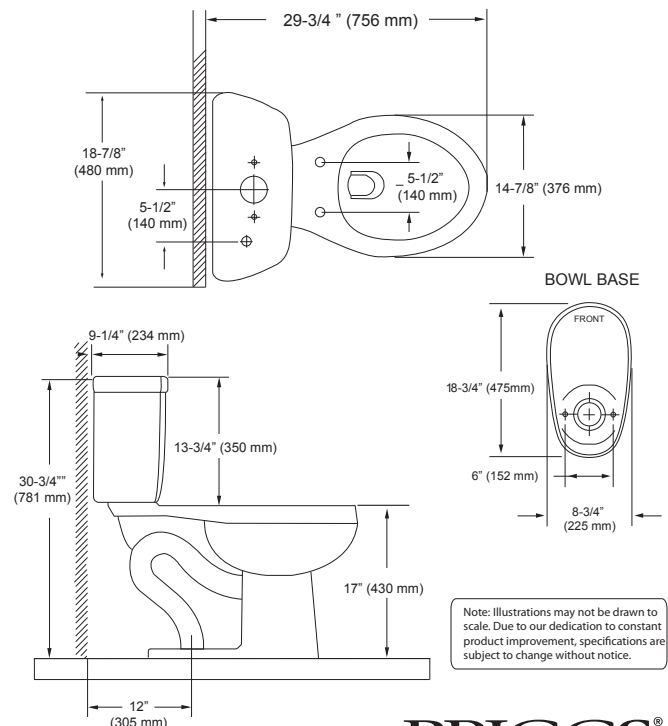

## BRIGGS®

High Efficiency Toilets

(800) 888-4458

www.briggsplumbing.com