

BRIGGS[®] FAUCETS

B482 / B482BN / B482RB

TWO HANDLE LAVATORY
CERAMIC CARTRIDGE, LOW-LEAD WATERWAY

FEATURES

- Available finishes and style allow this faucet to accommodate most lavatories
- Installation description is 8" widespread center
- Includes 50/50 pop-up drain
- Flow is limited to 2.0 gpm max at 60 psi
- Dual handles are easy to use and ADA compliant
- Ceramic disc cartridge
 - Non-metallic, non-ferrous and brass materials
 - Single body construction
- One year limited warranty against defects in materials and manufacturing workmanship

FINISHES



CHROME



BRUSHED
NICKEL



OIL RUBBED
BRONZE

MAINTENANCE

Please read the following before installation and operation.

1 Installation

- Rinse the inlet pipe clean.
- Connect the appropriate water supplies:
 - Hot water on the left side
 - Cold water on the right side

2 Technical Parameter

- Water Pressure: 0.1 MPa - 0.86 MPa
- Water Temperature: 41-160° F

3 Surface Maintenance


Remove as much surface dirt and film using clean water and cotton cloth.

Spray cleaners including mild liquid detergents, clear liquid glass cleaner, non-acidic and full dissolved powder cleaners or non-abrasive liquid polishers on a rag are acceptable to clean the faucet surface.

Once clean, rinse the faucet thoroughly with clean water to remove the cleaner then dry with soft cotton cloth.



CODES

- Certified to ASME A112.18.1 IAPMO cUPC



- Complies with Americans with Disabilities Act (ADA)

SPECIFICATIONS

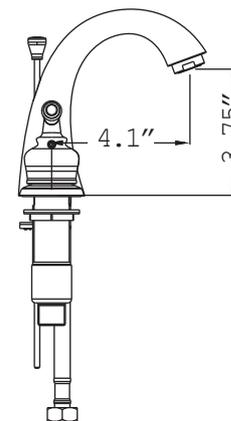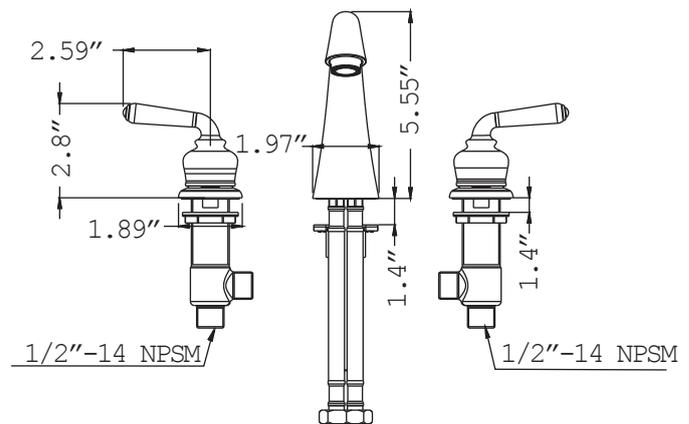

- For reference only (unit = inch)
Illustrations may not be to scale
Dimensions are subject to change without notice