

B829 / B829S

TWO HANDLE KITCHEN

WASHERLESS STEM CARTRIDGE, LOW-LEAD WATERWAY

FEATURES

- Stainless steel finish complements popular kitchen appliances and other kitchen accessories
- Mounts in single hole or 3 hole installation
- Includes stainless steel side spray
- Flow is limited to 2.0 gpm max at 60 psi
- Single control handle gives easy control of water temperature
- Washerless stem cartridge is beneficial in preventing drips
- One year limited warranty against defects in materials and manufacturing workmanship

FINISHES



STEEL

MAINTENANCE

Please read the following before installation and operation.

1 Installation

Rinse the inlet pipe clean. Connect the appropriate water supplies: Hot water on the left side Cold water on the right side

2 Technical Parameter

Water Pressure: 0.1 MPa - 0.86 MPa Water Temperature: 41-160° F

³ Surface Maintenance

Remove as much surface dirt and film using clean water and cotton cloth.

Spray cleaners including mild liquid detergents, clear liquid glass cleaner, non-acidic and full dissolved powder cleaners or non-abrasive liquid polishers on a rag are acceptable to clean the faucet surface.


Once clean, rinse the faucet thoroughly with clean water to remove the cleaner then dry with soft cotton cloth.

CODES



SPECIFICATIONS

ഠ

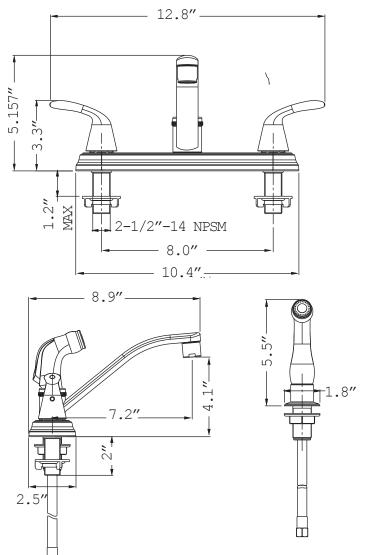

■ For reference only (unit = inch) Illustrations may not be to scale Dimensions are subject to change without notice

Briggs Plumbing Products 800-888-4458 www.briggsplumbing.com