

# BRIGGS®



## CONSERVER™ MAX TOILET

### Features

Two-piece 1.6 or 1.1 gpf/ 6.0 or 4.8 Lpf toilet

#### Bowls:


|               |                          |
|---------------|--------------------------|
| Round         | 4380- 41.4 lbs / 18.8 kg |
| Elongated     | 4385- 42.3 lbs / 19.2 kg |
| Elongated ADA | 4388- 44.5 lbs / 20.2 kg |

#### Tank:

|               |                          |
|---------------|--------------------------|
| 12" Rough-in: | 4485- 34.3 lbs / 15.6 kg |
|---------------|--------------------------|

- 1.6 gpf or 1.1 gpf Dual Flush options
- Tank Made in USA
- Fluidmaster® fill valve
- 3" Flush valve
- Top-mount chrome push button
- High performance jetted bowl
- 2" Fully glazed trapway
- Available in White only
- Limited Lifetime Warranty

## Dimensions

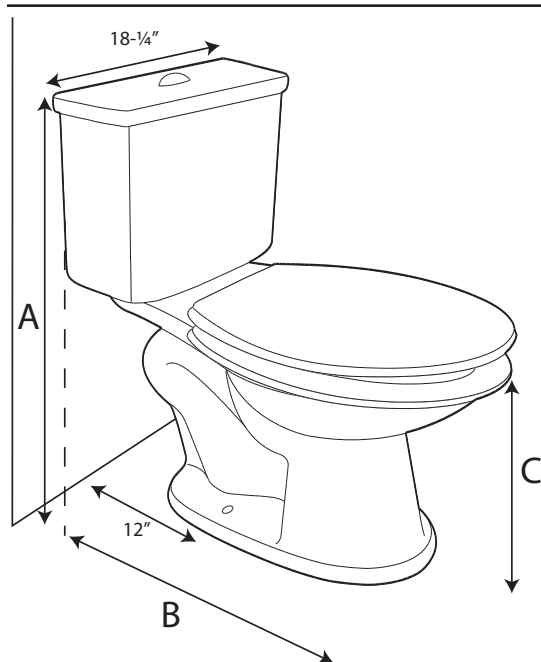

|           | 4217<br>Round | 4218<br>Elongated | 4219<br>ADA   |
|-----------|---------------|-------------------|---------------|
| <b>A</b>  | 31-1/4" (794) | 31-1/4" (794)     | 33-1/4" (845) |
| <b>B*</b> | 28-1/4" (718) | 30-1/4" (768)     | 30" (762)     |
| <b>C</b>  | 14-7/8" (378) | 14-7/8" (378)     | 17" (432) ♿   |

\*Measurement is from the wall to front of the foot

Dimensions may vary (+) or (-) 1/4". Dimensions shown in parentheses are in millimeters: 25.4 mm = 1 inch. Note: Fixture dimensions are nominal and conform with dimension and performance requirements of ASME A112.19.2-2008 / CSA B45.1-08 standards. PSI rating: 20 minimum to 80 maximum per ASME A112.19.2008 / CSA B45.1-08. Dimensions subject to change or cancellation without notice. Briggs is not responsible for the use of superseded or voided specification information.

[www.briggsplumbing.com](http://www.briggsplumbing.com)

jrrev20171108